

HADK-A40Q

DTH HAMMER (QL4)



Key features

- Repair & Rebuild kits available for easy and cost effective maintenance
- High frequency design for fastest penetration rates
- Available for common bits shanks IR/QL/SD
- Customizable options for open hole or cased hole projects
- Premium alloys & treatment used for longer lasting tools

Parts List (QL4)

NO	Part Name	Qty	Part Number
1	Top Sub	1	HPDK-A4002
2	Top Sub O-Ring	1	HPDK-A4003
3	Spacer Ring	1	HPDK-A4005
4	Make Up Ring	1	HPDK-A4006
5	Choke Set	1	HPDK-A4008
6	Check Valve	1	HPDK-A4007
7	C.V. Spring	1	HPDK-A4009
8	Air Distributor	1	HPDK-A4010
9	Air Dis. O-Ring	1	HPDK-A4011
10	Cylinder	1	HPDK-A4012
11	Piston	1	HPDK-A4014-Q
12	Wear Sleeve	1	HPDK-A4001-Q
13	Piston Ret. Ring	1	HPDK-A4017
14	Bit Bearing	1	HPDK-A4020-Q
15	Bit Ret. Ring	1	HPDK-A4018-Q
16	Bit Ret. Ring O-Ring	1	HPDK-A4019
17	Drive Sub	1	HPDK-A4022-Q
Complete Hammer			HADK-A40Q
Sealkit (Items 2, 9 ,16)			HPDK-A40SEALKIT

Dimensions & Weights

Top Sub Connection	2 3/8" API REG PIN
Eff. Length (in / mm)	39.2 / 995.6
OD (in / mm)	3.86 / 98
Hammer Weight (lbs / Kg)	86 / 39
Piston Weight (lbs / Kg)	16.3 / 7.4


Drilling Parameters

Working Pressure (PSI / Bar)	150-350 / 10.3-24.1
Application Bit (in / mm)	4-5 / 101-127
Rotation Speed (RPM)	20-45
Assembly Make-Up Torque (lb-Ft / N-m)	2000 / 2712
Rotation Torque (lb-Ft / N-m)	600 / 815
Frequency (blows / min)	1350

Air Consumption

PSI	BAR	CFM	M ³ /Min
150	10.3	230	6.5
250	17.2	425	12
350	24.1	640	18.1

Exploded view

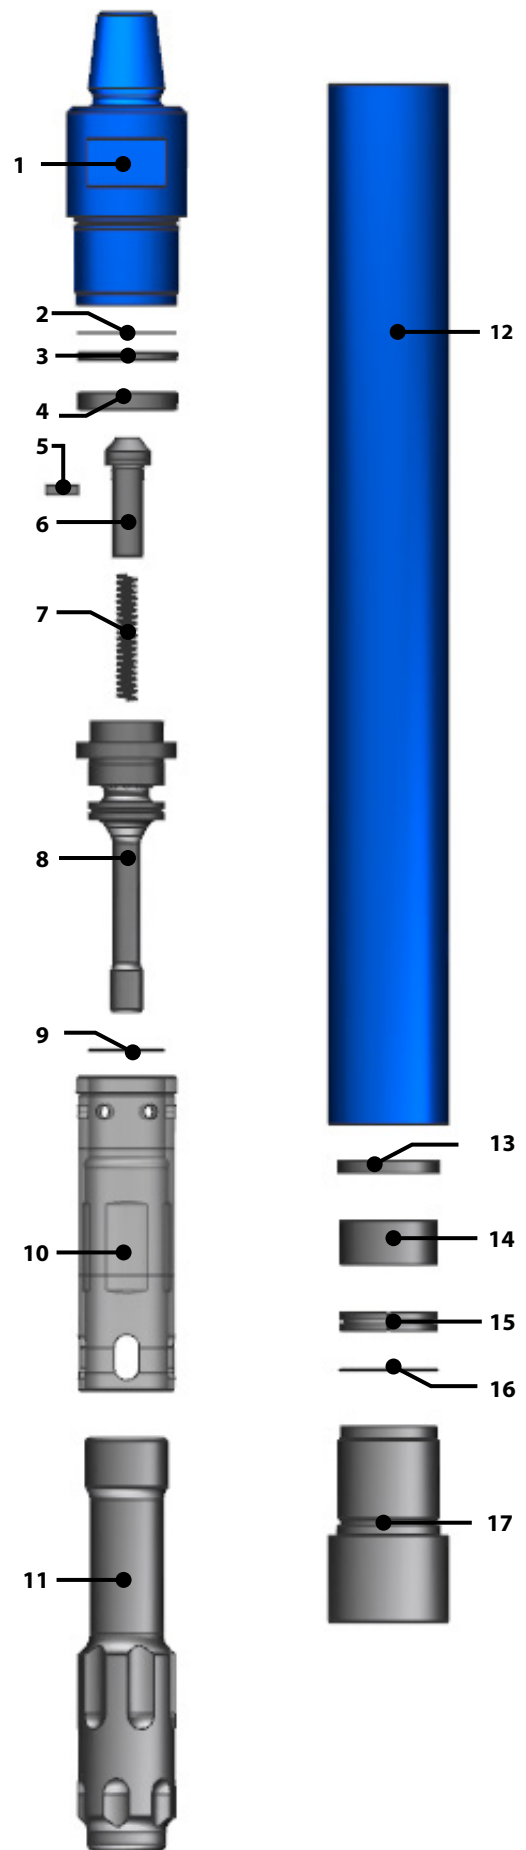

Note: Drilling Parameters given are guideline only