

HADK-A50QHD

AIR HAMMER (QL50 H.D.)



Key features

- Repair & Rebuild kits available for easy and cost effective maintenance
- High frequency design for fastest penetration rates
- Available for common bits shanks IR/QL/SD
- Customizable options for open hole or cased hole projects
- Premium alloys & treatment used for longer lasting tools

Parts List (QL50 H.D.)

NO	Part Name	Qty	Part Number
1	Top Sub	1	HPDK-A5002-QHD
2	Top Sub O-Ring	1	HPDK-A5003
3	Choke Set	1	HPDK-A5008
4	Check Valve	1	HPDK-A5007
5	C.V. Spring	1	HPDK-A5009
6	Spring Washer	1	HPDK-A5005
7	Make Up Ring	1	HPDK-A5006
8	Air Distributor	1	HPDK-A5010
9	Air Dis. O-Ring	1	HPDK-A5011
10	Cylinder	1	HPDK-A5012
11	Piston	1	HPDK-A5014-Q
12	Wear Sleeve	1	HPDK-A5001-QHD
13	Snap Ring	2	HPDK-A5021
14	Bit Bearing	1	HPDK-A5020-Q
15	Bit Ret. Ring	1	HPDK-A5018-Q
16	Bit Ret. Ring O-Ring	1	HPDK-A5019
17	Drive Sub	1	HPDK-A5022-QHD
Complete Hammer			HPDK-A50QHD
Sealkit (Items 2, 9, 16)			HPDK-A50SEALKIT

Dimensions & Weights

Top Sub Connection	3 ½ API REG PIN
Eff. Length (in / mm)	42.78 / 1087
OD (in / mm)	5 / 121
Hammer Weight (lbs / Kg)	165 / 74.8
Piston Weight (lbs / Kg)	25 / 11.3


Drilling Parameters

Working Pressure (PSI / Bar)	150-350 / 10.3-24.1
Application Bit (in / mm)	5-6 ¼ / 127-152
Rotation Speed (RPM)	15-40
Assembly Make-Up Torque (lb-Ft / N·m)	4500 / 6100
Rotation Torque (lb-Ft / N·m)	725 / 983
Frequency (blows / min)	1540

Air Consumption

PSI	BAR	CFM	M ³ /Min
150	10.3	310	8.8
250	17.2	555	15.7
350	24.1	720	20.4

Exploded view

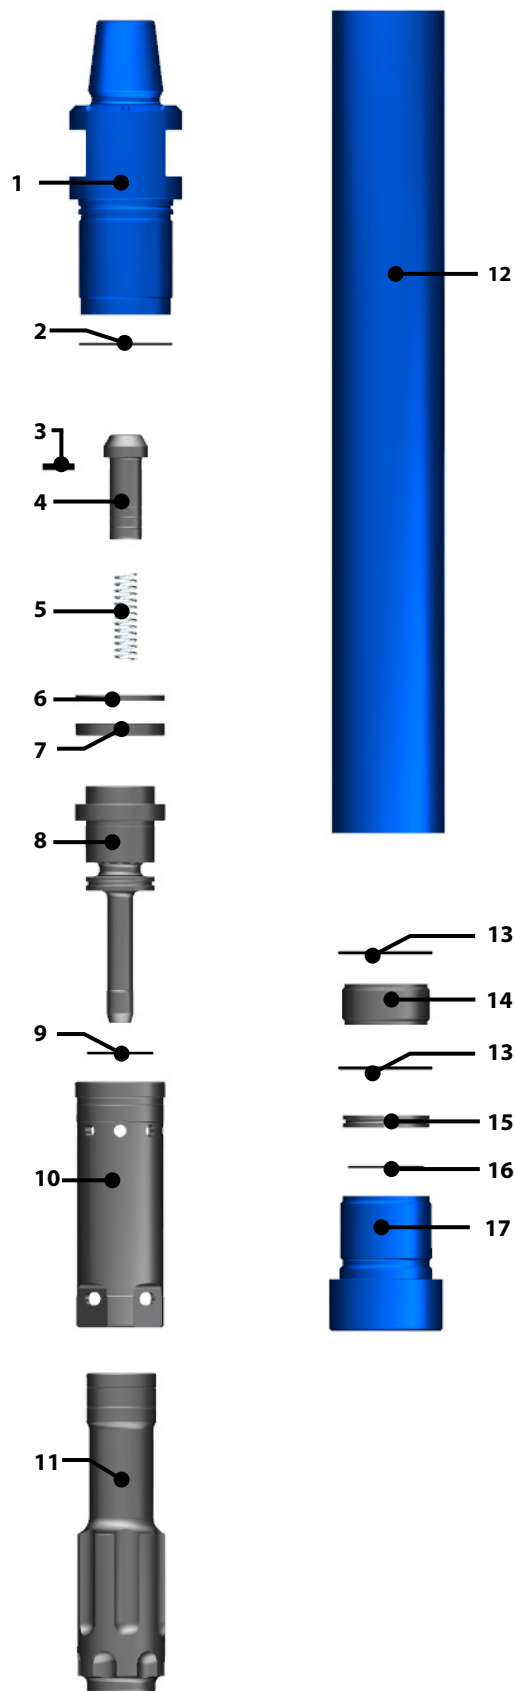

Note: Drilling Parameters given are guideline only