

HADK-A600QHD

DTH HAMMER (QL6HD)



Key features

- Repair & Rebuild kits available for easy and cost effective maintenance
- High frequency design for fastest penetration rates
- Available for common bits shanks IR/QL/SD
- Customizable options for open hole or cased hole projects
- Premium alloys & treatment used for longer lasting tools

Parts List (QL6HD)

NO	Part Name	Qty	Part Number
1	Top Sub	1	HPDK-A6002-QHD
2	Top Sub O-Ring	1	See Sealkit
3	Choke Set	1	HPDK-A6008
4	Check Valve	1	HPDK-A6007
5	C.V. Spring	1	HPDK-A6009
6	Spring Washer	1	HPDK-A6005
7	Make Up Ring	1	HPDK-A6006
8	Air Distributor	1	HPDK-A6010-LYT-WGT
9	Air Dis. O-Ring	1	See Sealkit
10	Cylinder	1	HPDK-A6012-LYT-WGT
11	Piston	1	HPDK-A6014-Q-LYT-WGT
12	Wear Sleeve	1	HPDK-A6001-QHD
13	Snap Ring	2	HPDK-A6021
14	Bit Bearing	1	HPDK-A6020-Q
15	Bit Ret. Ring	1	HPDK-A6018-Q
16	Bit Ret. Ring O-Ring	1	See Sealkit
17	Drive Sub (Chuck)	1	HPDK-A6022-QHD
Complete Hammer			HADK-A600QHD
Sealkit (Items 2, 9, 16)			HPDK-A60SEALKIT

Dimensions & Weights

Top Sub Connection	3 ½ API REG PIN
Eff. Length (in / mm)	42.16 / 1071
OD (in / mm)	5.75 / 146
Hammer Weight (lbs / Kg)	198 / 89.8
Piston Weight (lbs / Kg)	41.6 / 18.7


Drilling Parameters

Working Pressure (PSI / Bar)	150-350 / 10.3-24.1
Application Bit (in / mm)	6-7 / 152-178
Rotation Speed (RPM)	12-40
Assembly Make-Up Torque (lb-Ft / N-m)	4500 / 6100
Rotation Torque (lb-Ft / N-m)	1500 / 2000
Frequency (blows / min)	1455

Air Consumption

PSI	BAR	CFM	M³/Min
150	10.3	348	9.84
250	17.2	532	15.04
350	24.1	720	20.4

Exploded view

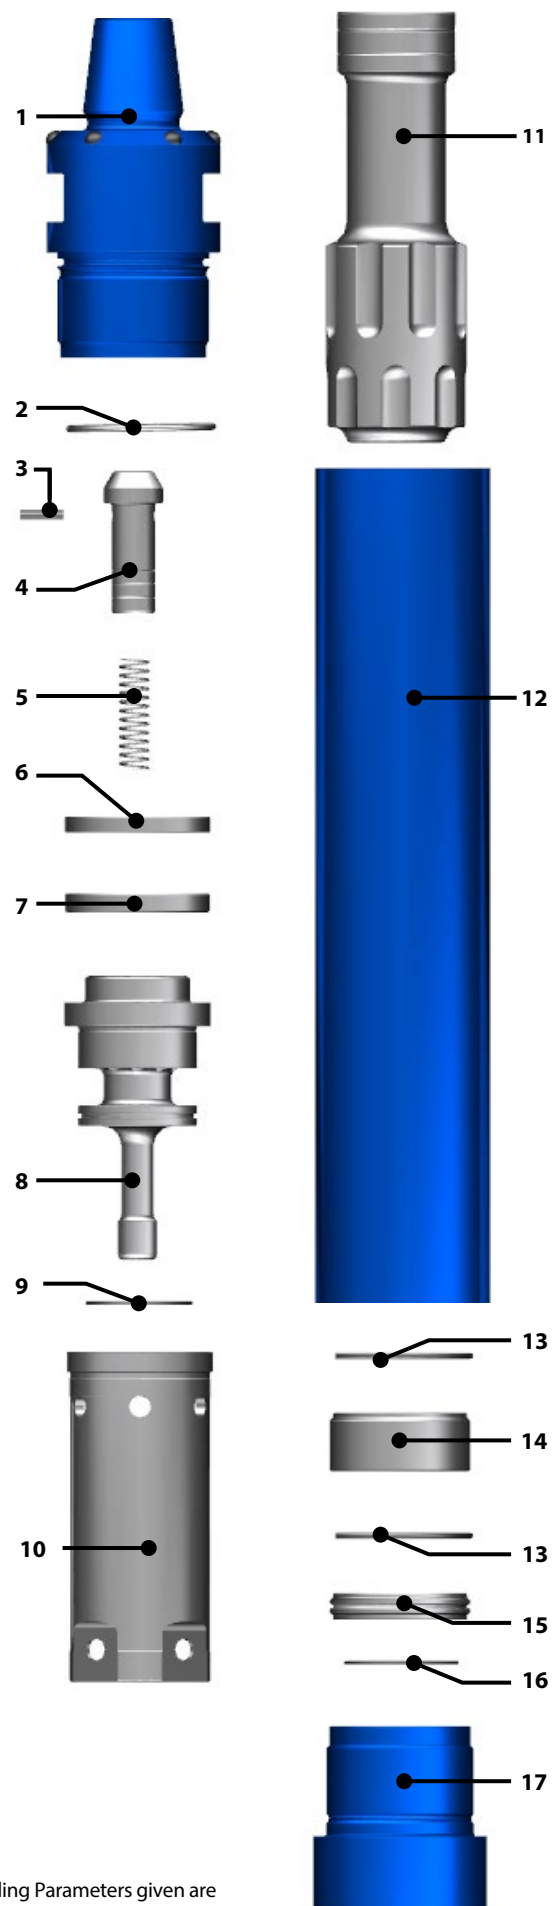

Note: Drilling Parameters given are guideline only